



The **PETKUS Seed Cleaner K 531** is used for high-quality seed cleaning of free flowing bulky products, e.g. grain, oilseeds, fine seeds (grass and vegetable seeds). The high standard of cleaning is achieved by a combination of the screening process, the air aspiration system, and the indented cylinders.

Advantages:

- Suitable for various products due to extensive setting options
- High standard of cleaning
- Simple and quick changing of screens and separating cylinders
- Two different air volume ranges adjustable for various products
- Equipment with two indented cylinders for a high sorting performance
- Highly effective cleaning of the screen surfaces by screen agitators (top screen) and brushes (bottom screen)
- Also suitable for intensive cleaning without the indented cylinder

Description:

The product is moved from the inlet hopper through the pre-aspiration duct. Light rejects, husk and dust are separated here.

Afterwards, the product is transported to the screen compartment. The top screen separates large and coarse rejects. The top screen is cleaned with a screen agitator. Light rejects are separated by the bottom screen. A brush carriage cleans the bottom screen.

The screened product is transported through the final aspiration duct. Further light rejects with lower density are separated there by the air flow. The cleaned product is transported to the indented cylinders where short rejects, e.g. broken grains and round weed seed are rejected.

The cleaned seed is transported to the bagging devices on the indented cylinder and can be bagged-off here.

Construction:


The Seed Cleaner K 531 is equipped with an inlet hopper, one pre- and final aspiration duct with depositing chambers, a screen compartment with two screen layers, and two parallel working indented cylinders. The various components of the machine (inlet hopper, screen compartments, fan etc.) are operated by a V-belt system with an electric motor.

Standard Equipment:

- Bolted frame made of painted sheet steel
- Set of screens for screening diagram
- Set of separating cylinder casings for the indented cylinders
- Screen agitators and brush carriage
- Drive unit with 4.0 kW electric motor


Options:

- Screens and separating cylinders available for a large number of different products

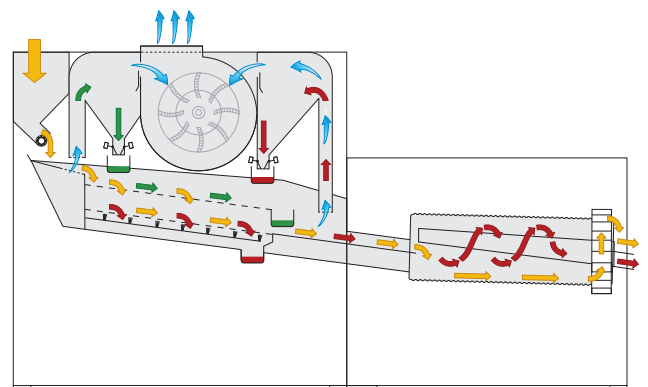

Working principle Seed Cleaner K 531

Seed Cleaner Type K 531

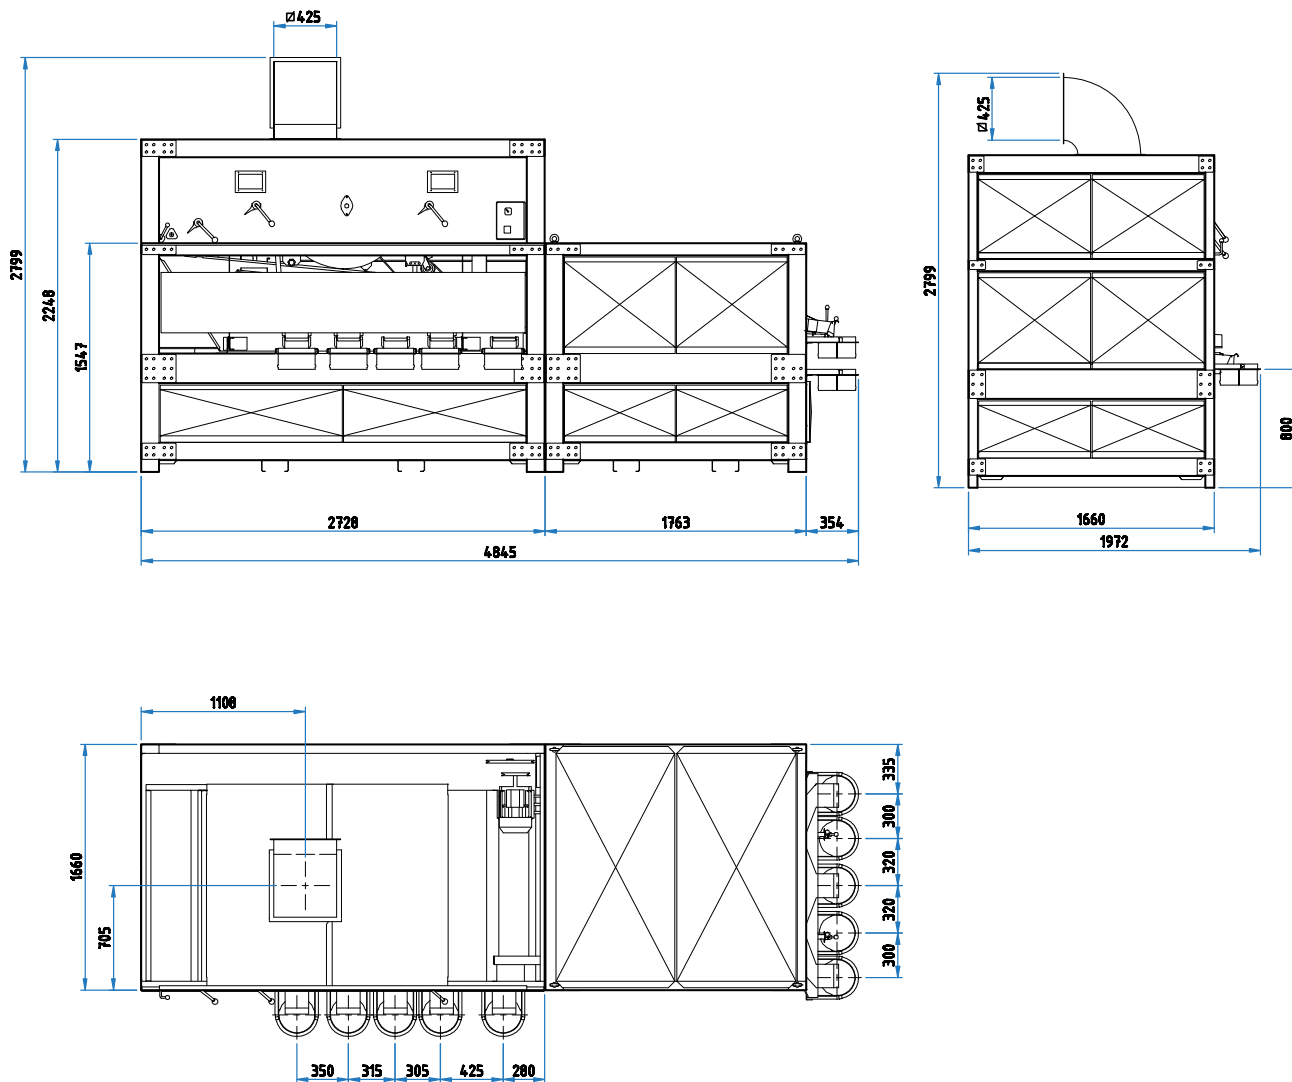

Technical Data		K 531
Capacity (Based on: wheat)		
Industrial cleaning	t/h	3.5
Seed cleaning	t/h	2.5
Working width	mm	1107
Screen area	m ²	2.96
Air volume 1	m ³ /h	5 400
Air volume 2	m ³ /h	7 500
Drive motor	kW	4.0
Speed	rpm	1 450
Speed of the fan 1	rpm	850
Speed of the fan 2	rpm	1 050
Speed indented cylinder	rpm	32
Weight	kg	1 900

Technical Data		K 531
No. of Screen layers	pcs.	2
Upper screen layer	pc.	1
Lower screen layer	pc.	1
Cleaning of upper screen layer		Agitators
Cleaning of lower screen layer		Brushes
No. of indented cylinder	pcs.	2
Dimension:		
Length	mm	5 060
Width	mm	2 100
Height	mm	2 210
Total height with pipe connection	mm	2 780
Air exhaust system		
Diameter pipe for exhaust system	mm	450
Cyclon type	FKA	1 600

Technical alteration reserved